
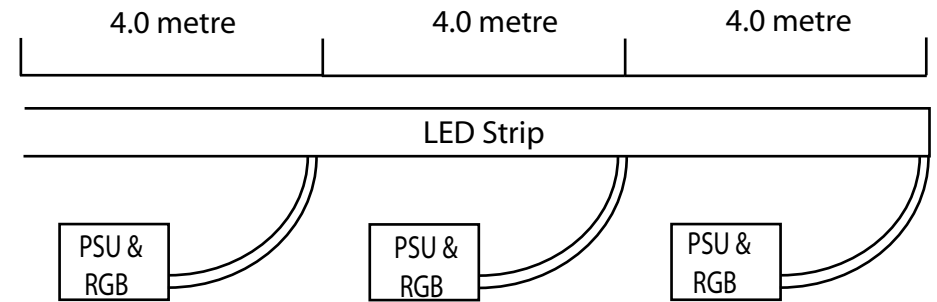


D4000 RGB COLOUR CHANGING LED BOARDS 13.5MM CTRS 24 VDC

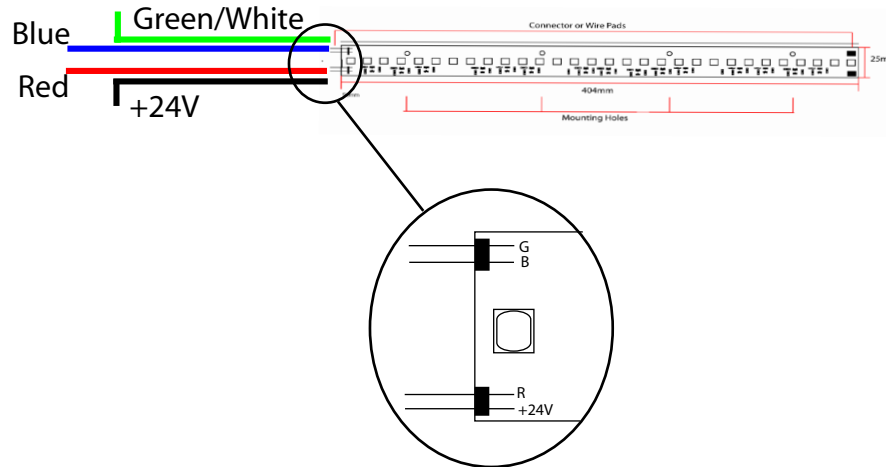


BEFORE OPERATION, ENSURE YOU HAVE READ AND UNDERSTOOD ALL THE INSTRUCTIONS AND INFORMATION IN THIS LEAFLET.

DISCONNECT THE SYSTEM FROM THE SUPPLY NETWORK BEFORE UNDERTAKING ANY INSTALLATION, MAINTENANCE OR REMOVAL.

THE UNIT MUST BE INSTALLED BY QUALIFIED PERSONAL.

- BOARDS ARE POLARITY SENSITIVE.
- MAXIMUM VOLTAGE MUST NOT EXCEED 24 V DC.
- MAXIMUM RUN LENGTH PER FEED-IN D4000 BOARDS IS 4 M.
- MAXIMUM TOTAL METRES PER SLAVE 11 METRES(D4000).
- EACH RUN LENGTH OVER MAXIMUM RUN LENGTH(4 METRES) MUST BE SEPARATELY WIRED TO SLAVE
- CONNECTION TO BOARD USE CONNECTOR D4000Z.
- LINKING BETWEEN BOARDS USE D4000 CONNECTOR.

D4000 Connector

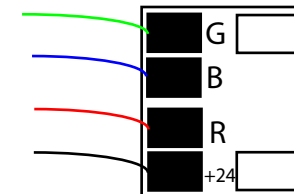

**Associated Controls (AUST) Pty Ltd**

2-4 Norfolk Rd, Greenacre, Sydney NSW  
 p + 6 1 2 9642 4922 - f + 61 2 9642 4955

PART#: D4000

UNIT: 400 MM  
 200 MM  
 80 MM

